

230 VAC G SERIES SERVOAMPLIFIERS

EtherCAT INTERFACE - 30 Amp models

FIVE DIGIT DISPLAY: It allows to monitor in real time the amplifier status

Fast Plug-in connector

PC CONNECTOR: The amplifier can be set and monitored by SanMotion motor setup and a Personal Computer USB C 3.0 interface

POWER CONNECTION: 230 VAC, single-phase / three-phase;
Built-in protection circuits against overload and input overvoltage

EtherCAT INTERFACE CONNECTOR: RJ45 - CAT5e

CONTROL POWER SUPPLY CONNECTOR: 230 VAC, single-phase;
Regenerative resistor connector

I/O CONNECTOR: 7 inputs and 2 outputs
Encoder output repetition


SAFE TORQUE OFF - SIL3 PL=e CONNECTOR



MOTOR POWER CONNECTOR (U-V-W phases)

ENCODER CONNECTOR

SECOND ENCODER CONNECTOR for external linear scale to avoid backlash

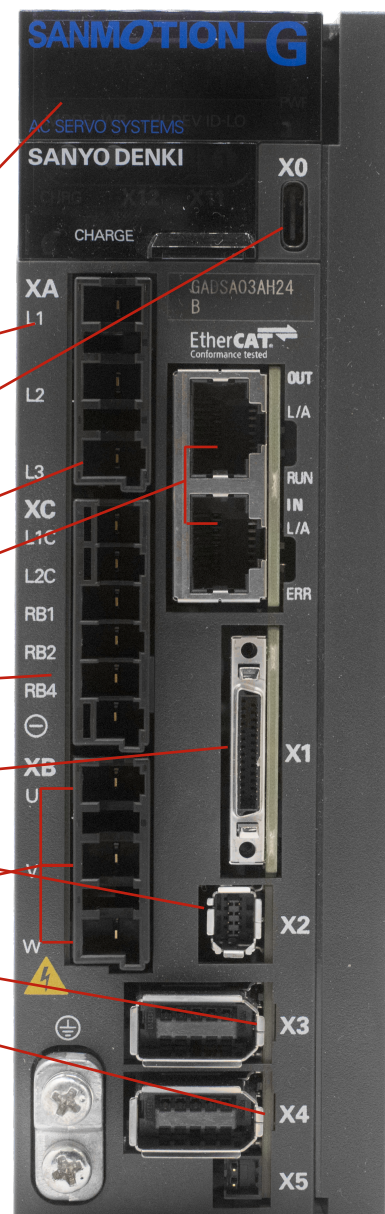

Model GADSA03AH24
Dimensions: (50x160x130)

MAIN FEATURES


- Safe Torque Off (STO) function - SIL3 [Performance Level - PL = E]
- Mode of Operations: Homing Mode, Profile Velocity Mode, Profile Position Mode, Profile Torque Mode, Cycle Sync Position Mode, Cycle Sync Velocity Mode, Cycle Sync Torque Mode
- One single amplifier size covers from 100 W to 1.5 kW motors
- XML file available
- Speed frequency response: 3.5 kHz
1.6 time faster compared to previous generation

TECHNICAL DATA

MODEL	GADSA03LH24	GADSA03AH24
CURRENT CAPACITY	30 Amp	
POWER SUPPLY VOLTAGE	Single-phase or three-phase (configurable by the user) 200VAC or 230 VAC (+10%, -15%) 50/60 Hz (± 3 Hz)	
CONTROL POWER SUPPLY	Single-phase from 200VAC to 230 VAC (+10%, -15%) 50/60 Hz (± 3 Hz)	
MAX COMPATIBLE MOTOR OUTPUT	1.5 kW	
REGENERATIVE RESISTOR	External (optional)	Built-in External (optional)
DIMENSIONS (mm)	50x160x130	
Mass (kg)	0.90 kg	

230 VAC G SERIES SERVOAMPLIFIERS

G SERIES AC SERVOAMPLIFIERS - EtherCAT INTERFACE

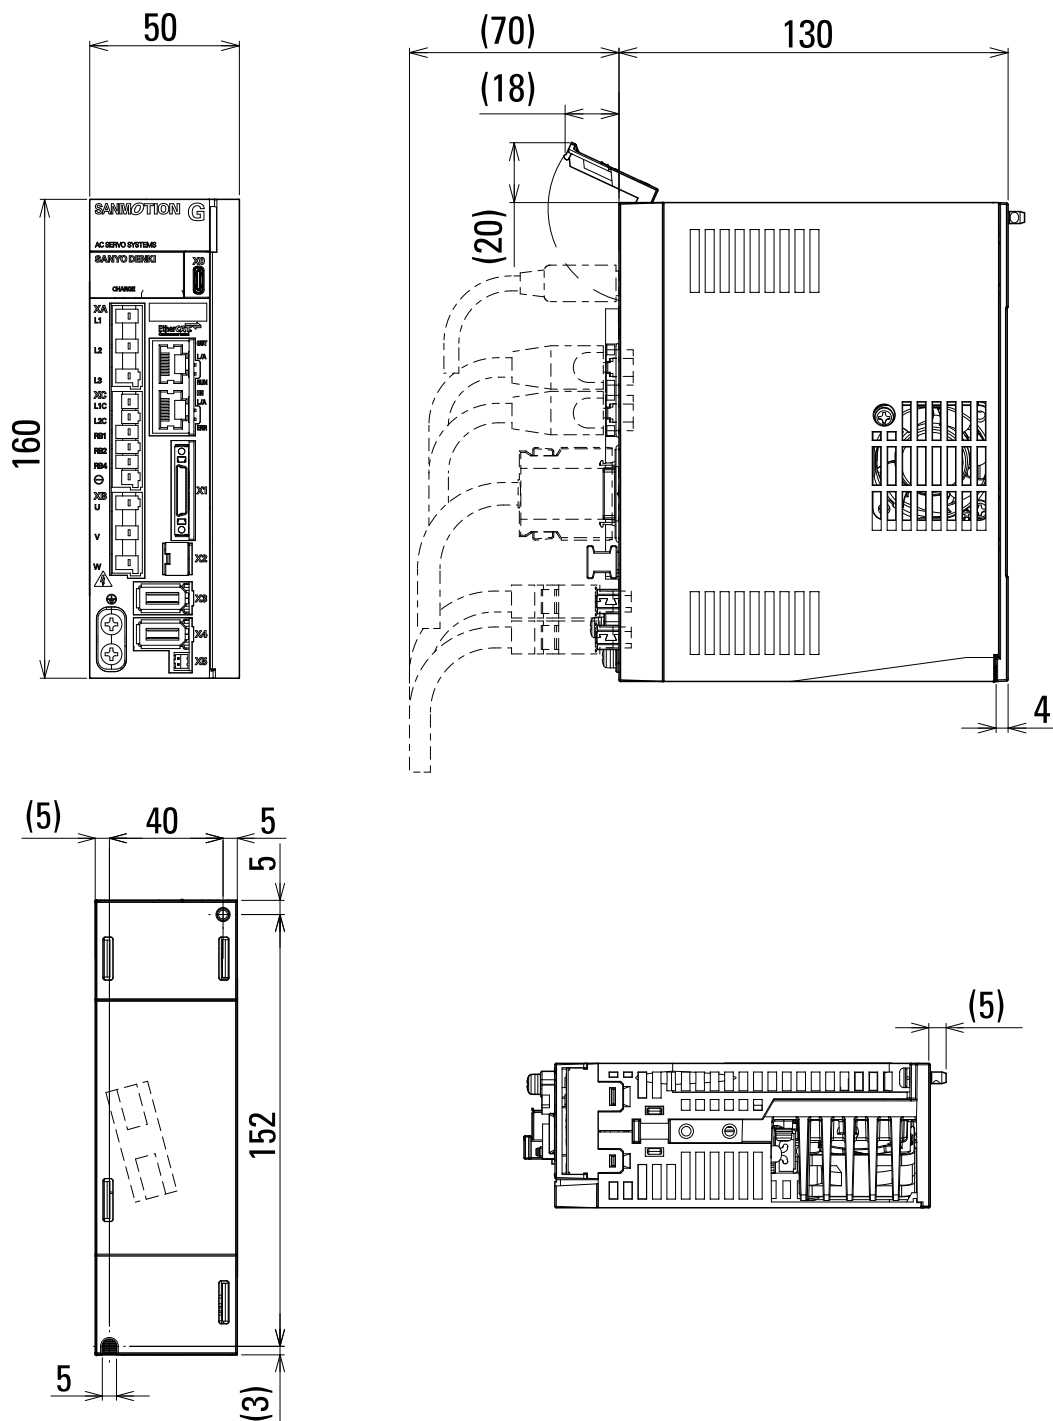

Dimensions mm.