X-PLUS ET B4 Series Drives





INTRODUCTION

- New series of stepping motor drives with EtherCAT interface, direct input from the main AC power supply (from 110 VAC to 230 VAC).
- Drives optimized for coupling with SANYO DENKI stepping motors, fitted with encoder, but also able to manage third party motors.
- High performance in terms of power and able to further increase the appication potential.
- Compact system, developed to offer a wide variety of integrated functions and optimized for the most demanding motion control applications.

MAIN Ether CAT FEATURES

- Modes of operation: PP, PV, Homing, CSP and CSV.
- Wide range of motor phase current setting and motor current overboost (120%).
- Different variety of HOMING operation modes.
- Encoder feedback and support of different resolution.
- Touch Probe function available.
- Limit switches management.
- Auto-sync function available featuring a closed loop positioning.
- 4 + 3 I/Os.

Please refer to download.rta.it for technical specifications



| Series | Model | V _{AC} range | I nom. | Digital In/Out | Dimensions |
|-----------|-------|-----------------------|--------|-------------------|------------|
| | | (Volt) | (Amp) | | (mm) |
| X-PLUS ET | B4 | 110 to 230 +/- 15% | 4.0 | 4/3 | 169x129x46 |

TECHNICAL FEATURES

- Range of operating voltage 110-230 VAC.
- Protections:
 - -Protection against under-voltage and over-voltage.
 - -Protection against a short-circuit at motor outputs.
 - -Overtemperature protection.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction.
- Available in boxed version with plug-in connectors.
- Maximum compactness.
- Optoinsulated auxiliary and programmable inputs and outputs.
- External fans not needed.
- UL/CSA.
- Warranty: 24 months.








SCAN THE QR CODE TO WATCH A VIDEO ON THE AUTO-SYNC FUNCTION



POWER AND LOGIC CONNECTIONS

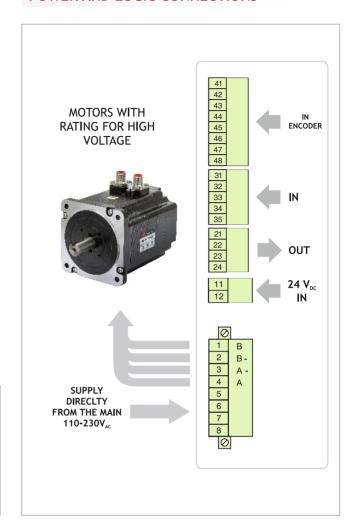

MECHANICAL DIMENSIONS

