SP2566-52SX00

SANYO DENKI
SANMOTION

Dimensions (Unit:mm)

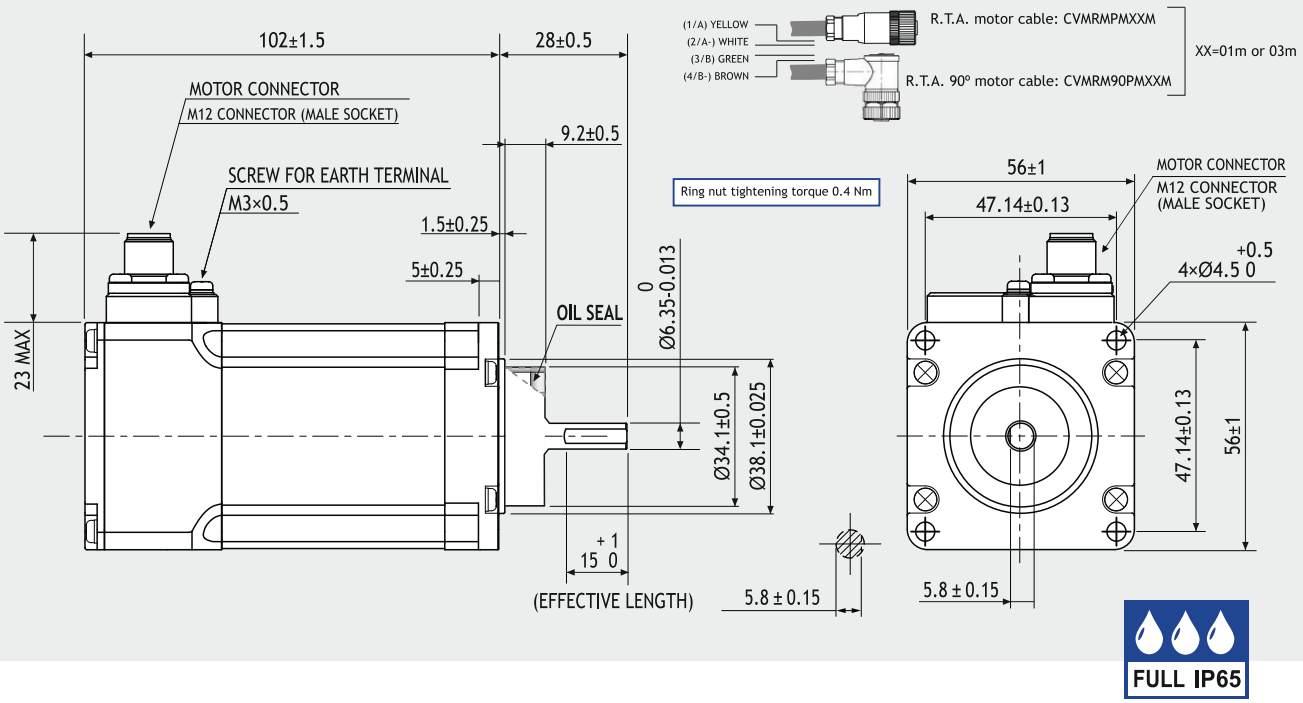

FULL IP65

FEATURES

MODEL		SP2566-52SX00
BASIC STEP ANGLE		1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)	3.0
RESISTANCE	(Ohm)	0.94
INDUCTANCE	(mH)	4.4
BIPOLAR HOLDING TORQUE	(Ncm)	170
ROTOR INERTIA	($Kgm^2 \times 10^{-7}$)	360
THEORETICAL ACCELERATION	($rad \times sec.^{-2}$)	47200
BACK E.M.F.	(V/Krpm)	55
MASS	(Kg)	1.2
INTERNATIONAL STANDARDS		UL, CSA, CE, RoHS
INSULATION VOLTAGE	(V)	250 V_{AC} (350 V_{DC})
PROTECTION DEGREE - INSULATION CLASS		FULL IP65 - F
LEADS CODE		V

TORQUE/SPEED CURVE

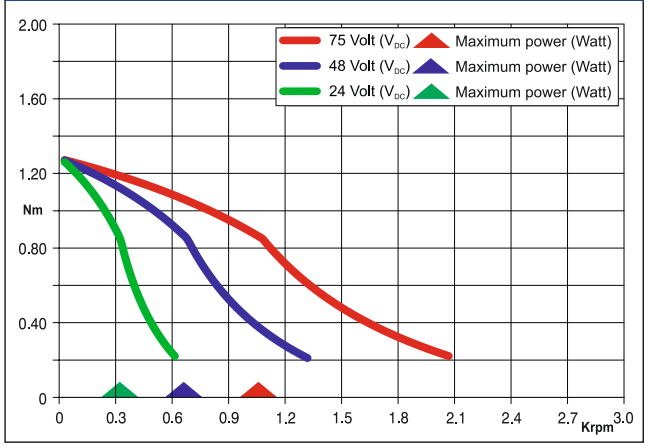

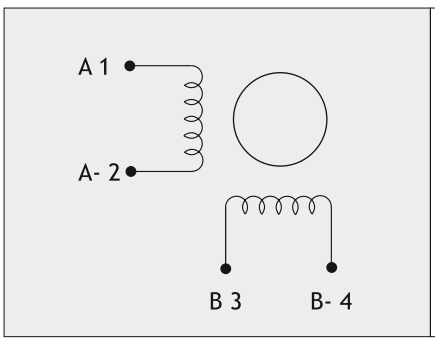

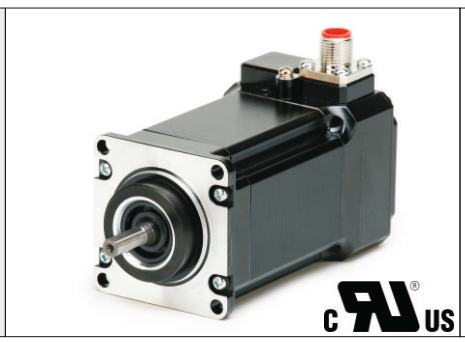

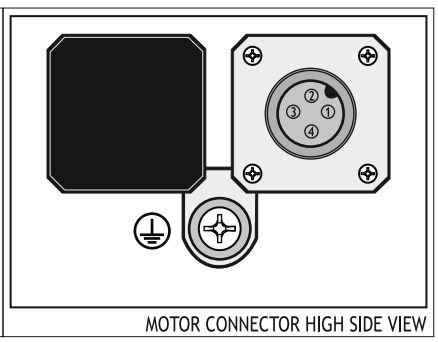

Suggested R.T.A. drive series: CSD, NDC, ADW, HGD, PLUS, FLEX-DRIVE

R.T.A. s.r.l.
Via E. Mattei - Fraz- Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzer Strasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in