CSD MT Series Drives





INTRODUCTION

- New series of stepping motor drives with Modbus interface, available with a 3rdgeneration firmware release and STO function.
- Drives optimized for coupling with SANYO DENKI stepping motors, fitted with encoder, but also able to manage third party motors.
- Compact system, developed to offer a wide variety of integrated functions and optimized for the most demanding motion control applications.

MAIN FEATURES

- Modes of operation: PP, PV, Homing.
- Wide range of motor phase current setting and motor current overboost (120%).
- Different variety of HOMING operation modes.
- Encoder feedback and support of different resolution.
- Touch Probe function available.
- Limit switches management.
- Auto-sync function available featuring a closed loop positioning.
- 5 + 5 I/Os (MT 94) and 2 + 3 I/Os (MT S4).
- UL/ CSA.

Please refer to download.rta.it for technical specifications



STO FUNCTION FEATURES

- Safe Torque Off (STO) function SIL3
- Error Detection Monitor



Series	Model	V_{DC} range	I nom.	Digital In/Out	sto In	Dimensions
		(Volt)	(Amp)			(mm)
CSD MT	S4 STO	24 to 48	4.0	2/3	2	130x106x32
CSD MT	94	24 to 48	4.0	5/5	/	130x106x32

TECHNICAL FEATURES

- Range of operating voltage 24-48 VDC.
- Protections:
 - -Protection against under-voltage and over-voltage.
 - -Protection against a short-circuit at motor outputs.
 - -Overtemperature protection.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction.
- Maximum compactness.
- Optoinsulated auxiliary and programmable inputs and outputs.
- Warranty: 24 months.








SCAN THE QR CODE TO WATCH A VIDEO ON THE AUTO-SYNC FUNCTION



POWER AND LOGIC CONNECTIONS

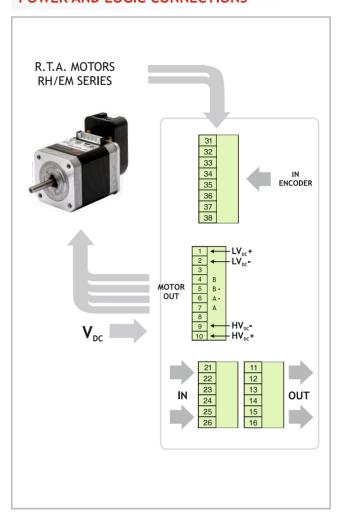

MECHANICAL DIMENSIONS

