

# X-PLUS C4 Series Drives

## INTRODUCTION

- Stepping motor drives series with Step & Direction interface and direct input from the main AC power supply (from 110 V<sub>AC</sub> to 230 V<sub>AC</sub>).
- The drive is equipped with an internal rectifier able to transfer more than 330 V<sub>DC</sub> (230 V<sub>AC</sub>) to the motor, in order to ensure the maximum power for the application as well as a significant cost saving on transformer and rectifier, together with the related cabling.
- Target: advanced application requiring great dynamic performance, high reliability and simplified power supply.
- UL/CSA certified.

## HIGHLIGHTS

- Microstepping function up to 4.000 step/rev.
- Connection directly to the main AC supply (110 to 230 V<sub>AC</sub>) normally avoiding the need for a transformer.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction at low and medium speed.
- External fans not needed: ideal both for mounting inside a metallic electrical cabinet and for stand-alone applications.
- Optoinsulated and differential input and output signals ease interfacing with the most commonly used control systems and ensure high noise immunity.
- Coupling with stepping motors rated for high voltage and equivalent or bigger than NEMA 34 is mandatory.



FILE NUMBER: E306454

ONE OF THE MOST COMPACT DRIVES WITH POWER INPUT DIRECTLY FROM THE MAIN AC SUPPLY (110 - 230 VAC)


Series	Model	V <sub>AC</sub> range	I <sub>NP</sub> min. (Peak value)	I <sub>NP</sub> max. (Peak value)	Dimensions
		(Volt)	(Amp)	(Amp)	(mm)
X-PLUS	C4	110 to 230 +/- 15%	2.4	4.0	152x129x46

## TECHNICAL FEATURES


- Range of operating voltages: 110-230 V<sub>AC</sub>.
- Range of current: 2.4-4.0 Amp. Setting up to four possible values by means of dip-switches.
- Microstepping: 400, 800, 1.600, 3.200 and 500, 1.000, 2.000, 4.000 steps /revolution. Setting by means of dip-switches.
- Automatic current reduction at motor standstill.
- Protections:
  - Protection against under-voltage and over-voltage.
  - Protection against a short-circuit at motor outputs.
  - Overtemperature protection.
- Optoinsulated inputs compatible with differential control signals.
- Possibility to switch off motor current with an external logic signal.
- High efficiency CHOPPER with IGBT final stage output.
- Electronic resonance damping circuit to ensure acoustic noise and mechanic vibrations reduction at low and medium speed.
- Alarm memory by use of yellow blinking led.
- External fans not needed.
- Coupling with stepping motors rated for high voltage and equivalent or bigger than NEMA 34 is mandatory.
- Version: boxed, equipped with crimp-type connectors. Maximum compactness.
- UL/CSA certified.
- Warranty: 24 months.



## POWER AND LOGIC CONNECTIONS

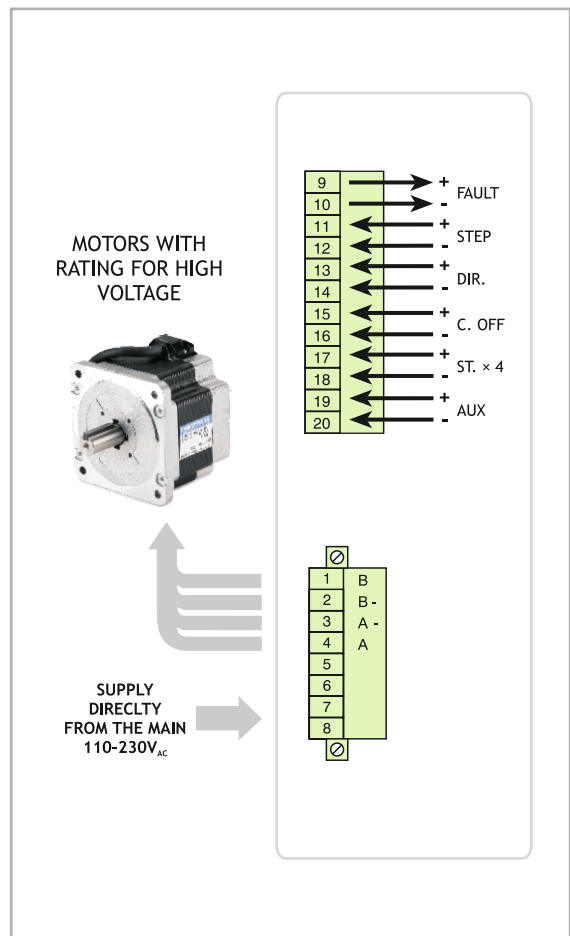

## MECHANICAL DIMENSIONS

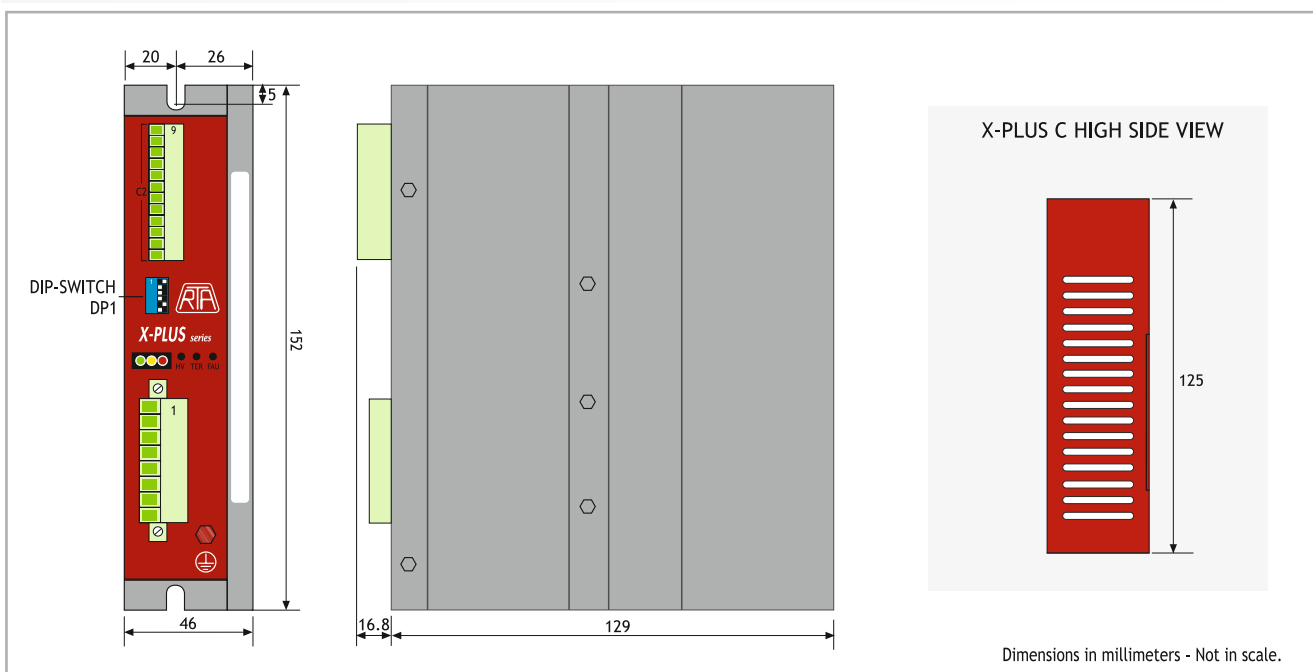

R.T.A. s.r.l.  
Via E. Mattei - Fraz- Divisa  
27020 Marcignago (PV) (Italy)  
T +39.0382.929.855  
F +39.0382.929.150  
www.rta.it

R.T.A. Deutschland GmbH  
Bublitzer Strasse 34, 40599  
Duesseldorf (Germany)  
T +49.211.749.668.60  
F +49.211.749.668.66  
www.rta-deutschland.de

R.T.A. IBERICA  
C/Generalitat 22, Local 1  
08850 Gava - Barcelona (Spain)  
T +34 936.388.805  
F +34 936.334.595  
www.rta-iberica.es

R.T.A. INDIA Pvt  
Teerth Business Center 3<sup>rd</sup> Floor, Unit No. 7,  
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,  
Pune 411026 (India)  
Tel. +91 9422507445  
www.rta-india.in